

PRICE LIST

Effective From 10.02.2025



salzer



Established in 1985 in a time-bound collaboration with Saelzer Schaltegerate Fabrik GmbH to manufacture rotary switches, and headquartered in Coimbatore, Salzer has grown into an independent multi-product entity with a wide basket of Electrical Products, covering a variety of applications for the Domestic, Industrial & Automobile segments.

With a wide network and business association with a major engineering conglomerate on specific product ranges in domestic market, Salzer products are also available as a preferred choice in over 40 countries worldwide.



Contents

Relay

M SERIES - MSP (Equivalent to MY)	4
M SERIES - MKG	5
M SERIES - MKP	6
M SERIES - MSC	7
PRC SERIES - Power Relays	8
RELAY MODULE	9

Relays (8536)

- AC & DC relays from 3A to 100 Amps from 1 to 4 pole
- DC power relays upto 125 Amps
- Miniature, General purpose, Power & Automotive Relays
- Termination via Solder, PCB mounted, Plug-In and Screw type terminals
- Silver contacts for enhanced life, **ERDA Tested & complies with JSS standards**

M SERIES - MSP (Equivalent to MY)

MSP	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 Type MSP (AC/DC) with LED at 240V AC/24V DC Plug in Enclosed Version - 5 Amps Resistive 2 Pole/3 Pole/4 Pole	MSP2P12	2P	12V DC	20	227
	MSP2P24	2P	24V DC	20	227
	MSP2P48	2P	48V DC	20	258
	MSP2P110	2P	110V DC	20	237
	MSP2P12A	2P	12V AC	20	252
	MSP2P24A	2P	24V AC	20	247
	MSP2P110A	2P	110V AC	20	278
	MSP2P240A	2P	240V AC	20	263
	MSP3P12	3P	12V DC	20	237
	MSP3P24	3P	24V DC	20	237
	MSP3P110	3P	110V DC	20	252
	MSP3P24A	3P	24V AC	20	288
	MSP3P110A	3P	110V AC	20	294
	MSP3P240A	3P	240V AC	20	309
	MSP4P12	4P	12V DC	20	237
	MSP4P24	4P	24V DC	20	237
	MSP4P48	4P	48V DC	20	263
	MSP4P110	4P	110V DC	20	258
	MSP4P12A	4P	12V AC	20	304
	MSP4P24A	4P	24V AC	20	294
	MSP4P110A	4P	110V AC	20	294
	MSP4P240A	4P	240V AC	20	304

MSP - Test Button	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
Approvals   2 Pole - 12 Amps/4 Pole - 7 Amps @ 277 V AC/30 V DC with Flag & LED-UL Marked	MSP2P012D12TNE	2P	12V DC	20	278
	MSP2P024D12TNE	2P	24V DC	20	278
	MSP2P110D12TNE	2P	110V DC	20	288
	MSP2P012A12TNE	2P	12V AC	20	299
	MSP2P024A12TNE	2P	24V AC	20	299
	MSP2P110A12TNE	2P	110V AC	20	324
	MSP2P240A12TNE	2P	240V AC	20	314
	MSP4P012D07TNE	4P	12V DC	20	314
	MSP4P024D07TNE	4P	24V DC	20	314
	MSP4P110D07TNE	4P	110V DC	20	335
	MSP4P012A07TNE	4P	12V AC	20	381
	MSP4P024A07TNE	4P	24V AC	20	355
	MSP4P110A07TNE	4P	110V AC	20	376
	MSP4P240A07TNE	4P	240V AC	20	381

M SERIES - MKG



MKG (AC/DC) with
LED indication - 5 Amps
Resistive at 240V AC/24 DC
Plug in Enclosed Version

MKG -	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
	MKG2P06	2P	6V DC	10	295
	MKG2P12	2P	12V DC	10	260
	MKG2P18	2P	18V DC	10	310
	MKG2P24	2P	24V DC	10	265
	MKG2P30	2P	30V DC	10	350
	MKG2P48	2P	48V DC	10	285
	MKG2P110	2P	110V DC	10	315
	MKG2P220	2P	220V DC	10	360
	MKG3P12	3P	12V DC	10	330
	MKG3P18	3P	18V DC	10	335
	MKG3P24	3P	24V DC	10	335
	MKG3P30	3P	30V DC	10	410
	MKG3P48	3P	48V DC	10	395
	MKG3P110	3P	110V DC	10	385
	MKG3P220	3P	220V DC	10	515
	MKG2P06A	2P	06V AC	10	290
	MKG2P12A	2P	12V AC	10	270
	MKG2P24A	2P	24V AC	10	265
	MKG2P110A	2P	110V AC	10	265
	MKG2P240A	2P	240V AC	10	340
	MKG3P12A	3P	12V AC	10	325
	MKG3P24A	3P	24V AC	10	315
	MKG3P110A	3P	110V AC	10	325
	MKG3P240A	3P	240V AC	10	390

RELAYS

M SERIES - MKP



Type MKP (AC/DC) with
LED indication -10 Amps
Resistive at 240V AC/24V DC
Plug in Enclosed Version

MKP	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
	MKP2P06	2P	06V DC	10	300
	MKP2P12	2P	12V DC	10	295
	MKP2P24	2P	24V DC	10	300
	MKP2P48	2P	48V DC	10	330
	MKP2P110	2P	110V DC	10	330
	MKP2P220	2P	220V DC	10	445
	MKP3P12	3P	12V DC	10	365
	MKP3P24	3P	24V DC	10	365
	MKP3P48	3P	48V DC	10	410
	MKP3P110	3P	110V DC	10	430
	MKP3P220	3P	220V DC	10	590
	MKP2P06A	2P	06V AC	10	320
	MKP2P12A	2P	12V AC	10	315
	MKP2P24A	2P	24V AC	10	315
	MKP2P110A	2P	110V AC	10	325
	MKP2P240A	2P	240V AC	10	420
	MKP3P12A	3P	12V AC	10	415
	MKP3P24A	3P	24V AC	10	415
	MKP3P110A	3P	110V AC	10	405
	MKP3P240A	3P	240V AC	10	465

Relays (8536)

M SERIES - MKP

MKP - Test Button	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
Approvals   Type MKP (AC/DC) with LED indication -10 Amps Resistive at 277V AC/24 DC Plug in Enclosed Version with Test Button/Mechanical Indicator	MKP2P012D10TNE	2P	12V DC	10	380
	MKP2P024D10TNE	2P	24V DC	10	380
	MKP2P110D10TNE	2P	110V DC	10	415
	MKP3P012D10TNE	3P	12V DC	10	455
	MKP3P024D10TNE	3P	24V DC	10	455
	MKP3P110D10TNE	3P	110V DC	10	515
	MKP2P024A10TNE	2P	24V AC	10	400
	MKP2P110A10TNE	2P	110V AC	10	410
	MKP2P240A10TNE	2P	240V AC	10	510
	MKP3P024A10TNE	3P	24V AC	10	500
	MKP3P110A10TNE	3P	110V AC	10	495
	MKP3P240A10TNE	3P	240V AC	10	555

Sockets for MK / MSP Series (8538)

SOCKETS	Cat No.	Coil Volts	Min. Pack	M.R.P. (₹) Per Unit
	MK08C	8 Pin for 2 C/O & Closed Terminals for "MKG/MKP" Relays	20	72
	MK11C	11 Pin for 3 C/O & Closed Terminals for "MKG/MKP" Relays	20	105
	MSP08C	Closed Terminals Socket for MSP - 2 Pole	20	107
	MSP14C	Closed Terminals Socket for MSP - 4 Pole	20	140
	MSP14P	PCB Socket for MSP - 4 Pole	50	52

UL Sockets for MK / MSP Series available on request

M SERIES - MIC

MIC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 MIC (AC/DC) - 12 Amps Resistive at 240V AC/24V DC/ Enclosed solder/ PCB Version	MIC2P12	2P	12V DC	20	240
	MIC2P24	2P	24V DC	20	250
	MIC3P12	3P	12V DC	20	280
	MIC3P24	3P	24V DC	20	285

M SERIES - MSC

MSC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 MSC (AC/DC) - 5 Amps Resistive at 240V AC/24V DC Enclosed Solder Version	MSC1P12	1P	12V DC	10	150
	MSC1P18	1P	18V DC	10	160
	MSC1P24	1P	24V DC	10	155
	MSC2P06	2P	06V DC	10	230
	MSC2P12	2P	12V DC	10	210
	MSC2P18	2P	18V DC	10	225
	MSC2P24	2P	24V DC	10	220
	MSC2P48	2P	48V DC	10	265
	MSC3P06	3P	06V DC	10	295
	MSC3P12	3P	12V DC	10	260
	MSC3P18	3P	18V DC	10	270
	MSC3P24	3P	24V DC	10	260
	MSC3P48	3P	48V DC	10	355
	MSC3P110	3P	110V DC	10	335
	MSC2P240A	2P	240V AC	10	330
	MSC3P240A	3P	240V AC	10	365

H SERIES - HSC

HSC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 HSC (AC/DC) - 10 Amps Resistive at 240V AC/24V DC Enclosed Solder Version	HSC1P12	1P	12V DC	10	210
	HSC1P18	1P	18V DC	10	235
	HSC1P24	1P	24V DC	10	220
	HSC2P12	2P	12V DC	10	285
	HSC2P18	2P	18V DC	10	340
	HSC2P24	2P	24V DC	10	300
	HSC3P12	3P	12V DC	10	360
	HSC3P24	3P	24V DC	10	375
	HSC2P240A	2P	240V AC	10	455
	HSC3P240A	3P	240V AC	10	515

H SERIES - HSR

HSR	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 HSR (AC/DC) - 16 Amps Resistive at 240V AC/24V DC/ Enclosed Solder Version	HSR1P12	1P	12V DC	10	225
	HSR1P18	1P	18V DC	10	245
	HSR1P24	1P	24V DC	10	250
	HSR2P12	2P	12V DC	10	320
	HSR2P18	2P	18V DC	10	355
	HSR2P24	2P	24V DC	10	330
	HSR3P12	3P	12V DC	10	410
	HSR3P18	3P	18V DC	10	480
	HSR3P24	3P	24V DC	10	440
	HSR2P240A	2P	240V AC	10	570
	HSR3P240A	3P	240V AC	10	605

Relays

PRC SERIES - Power Relays

PRC	Cat No.	No of Poles	Coil Volts	Min Pack	M.R.P. (₹) Per Unit
 PRC 30 (AC/DC) - 30 Amps Resistive at 240V AC/24V DC/ Enclosed	PRC301P12	1P	12V DC	4	375
	PRC301P24	1P	24V DC	4	380
	PRC302P12	2P	12V DC	4	505
	PRC302P24	2P	24V DC	4	510
	PRC303P12	3P	12V DC	4	670
	PRC303P24	3P	24V DC	4	675
	PRC301P240A	1P	240V AC	4	410
	PRC302P240A	2P	240V AC	4	540
	PRC303P240A	3P	240V AC	4	690

 PRC 40 (AC/DC) - 40 Amps Resistive at 240V AC/24V DC/ Enclosed	PRC401P12	1P	12V DC	4	380
	PRC401P24	1P	24V DC	4	385
	PRC401P48	1P	48V DC	4	530
	PRC401P240A	1P	240V AC	4	415


 PRC 60 (AC/DC) - 60 Amps Resistive at 240V AC/24V DC/ Enclosed PRC 80 (AC/DC)-80 Amps Resistive at 240V AC/24V DC/ Enclosed PRC 100 (AC/DC) - 100 Amps Resistive at 240V AC/24V DC/ Enclosed	PRC601P12	1P	12V DC	4	430
	PRC601P24	1P	24V DC	4	440
	PRC601P240A	1P	240V AC	4	525
	PRC801P12	1P	12V DC	3	535
	PRC801P24	1P	24V DC	3	550
	PRC801P240A	1P	240V AC	3	720
	PRC1001P12	1P	12V DC	3	735
	PRC1001P24	1P	24V DC	3	770
	PRC1001P240A	1P	240V AC	3	790

RELAYS

Relay Modules (8536)

salzer

1 & 2 Changeovers with 2,4,6 & 8 channels

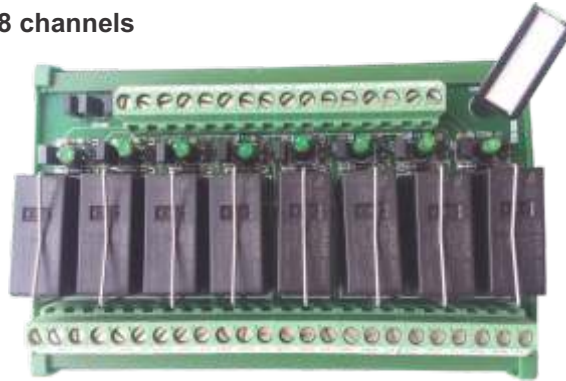

1 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	1 CO, 24VDC with OMRON Relay	2	RMS021P24	470
	1 CO, 24VDC with OMRON Relay	4	RMS041P24	860
	1 CO, 24VDC with OMRON Relay	8	RMS081P24	1385

1 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	1 CO, 110VAC with OMRON Relay	4	RMS041P110AC	1665
	1 CO, 110VAC with OMRON Relay	8	RMS081P110AC	2985
	1 CO, 230VAC with OMRON Relay	2	RMS021P230AC	960
	1 CO, 230VAC with OMRON Relay	4	RMS041P230AC	1855
	1 CO, 230VAC with OMRON Relay	8	RMS081P230AC	3625

2 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	2 CO, 24VDC with OMRON Relay	2	RMS022P24	620
	2 CO, 24VDC with OMRON Relay	4	RMS042P24	1075
	2 CO, 24VDC with OMRON Relay	8	RMS082P24	2070

2 C/O RELAY MODULE

	Description	Modules	Cat No.	MRP (₹) Per Unit
	2 CO, 230VAC with OMRON Relay	2	RMS022P230AC	1095
	2 CO, 230VAC with OMRON Relay	4	RMS042P230AC	2035
	2 CO, 230VAC with OMRON Relay	8	RMS082P230AC	4060

* Other Coil Voltages offered on request



Toroidal Transformers / Current Transformers

Single Phase 15VA - 30KVA & Three Phase 1KVA - 120KVA. CT's : Accuracy Class of 0.2 to 3 with burden of 5 to 30VA, Primary Current upto 4000A & Secondary of 5A / 1A



Transformers & Chokes / Inductors / Reactors

Dry type Magnetics - VPI, AN - AF - Water Cooling etc. Transformers Range: 1KVA to 1MVA, 1Phase and 3Phase


Chokes / Inductors / Reactors Range:
1KVAR to 1MVA 1Phase and 3 Phase



Wires & Cables - Wire Harness / Power Cords

Range from 0.5 sq mm to 300 sq mm Building Wires, Flexible Wires, Multi Core Cables, Flat Cables, HFFR, FRLS, ZHFR Wires, UL Rated Wires, Shielded & Braided Wires

Bunched Conductors, Tinned Copper wires & Customised cables. Wire Harness for: Industrial Applications, Consumer Electronics, Automobile Industries, Medical Electronics.

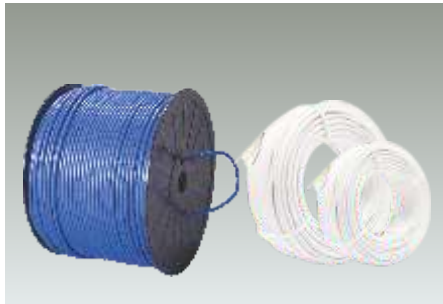

LAN Cables & CCTV Cables

Horizontal Cable specification testing Lab
UL Listed - CM Flame Rating

ETL verified to ANSI / TIA-568.2-D Cat6

FR PVC, ROHS & REACH Compliance

Shielded / Unshielded Cat5e, Cat6, Cat6A & Cat7

CCTV Cables - for High performance Hybrid Data Transfer offered in 3+1 & 4+1 type



Enameled Copper Wire & Polywrap Wires

Manufactured from 99.97 % pure ETP grade copper & insulated with high temperature engineered enamel

Wire ranges from 0.1 mm to 3.0 mm nominal diameter (11 to 42 swg & 9 to 38 awg)
Insulation range available in grade 1, 2 & 3 as per IEC in single, heavy & triple as per NEMA Available in 130(B), 155(F), 180(H) & 200° classes

Polywrap Wires: Range from 0.4mm to 2.1mm upto 105°C as per IS Standards



Sensors

Speed Sensors : Active/Passive Sensors with Speed range upto 30,000 rpm in Square/Sine wave output.

Position Sensors : Active/Passive Sensors with Rotation angle 0-90/0-180 & 0-360 with Analogue/Resistive output signal

Temperature Sensors : NTC/PTC types with Resistive output signal

Pressure Sensors : Absolute/Relative pressure from 0 to 1000 bar with Ratiometric

Voltage/current output signal, with different ingress protection of IP65/IP67/IP69K



MCB'S & Distribution Boards

MCB's are offered in various current ratings from 0.5 to 63 Amps. Enclosures, Plug & Sockets, Single Phase DB, Three Phase DB, Vertical DB, Phase Selector DB, 7 & 8 Segment DB's etc.



EV CHARGER

AC Charger - 3.3, 10, 14, 7.4, 15 & 22kW

DC Charger - 60, 90, 120, 240 & 360kW

Charging method through RF ID and Wallet.



SMART METER

1 Phase : 5-30 / 10 - 60A smart meter with GPRS/RF/NB - IOT communication with DLMS Compliance

3 Phase WC 10 - 60/ 20 - 100Amps smart meter with GPRS/RF/NB - IOT communication with DLMS Compliance

3 Phase LT-CT - 5A smart meter with GPRS/RF/NB - IOT communication with DLMS Compliance



Guarantee :

All prices are maximum retail price basis inclusive GST and any other Tax as applicable.

All the products listed in the price list carry a warranty, against manufacturing defects for a period of 18* months from the date of purchase.

The warranty is however subject to provision of proper usage, effective maintenance, it does not cover faulty operation and willful or accidental damage.

The user needs to take adequate precautions to eliminate these conditions. The manufacturer shall not be liable for any consequential loss, injury or damages attributable to defect or failure of its products.

Product development is a continuous process and hence data / prices given are subject to change without notice. Disputes if any are subject to Coimbatore jurisdiction only.

Salzer Electronics Limited

Samichettipalayam, Jothipuram Post, Coimbatore 641047. INDIA

Tel : +91-422- 4233600 | e-mail : sales@salzergroup.com

For Product Enquiries  **1800 1030 161**

www.salzergroup.com